



CHECK VALVE - 2500#

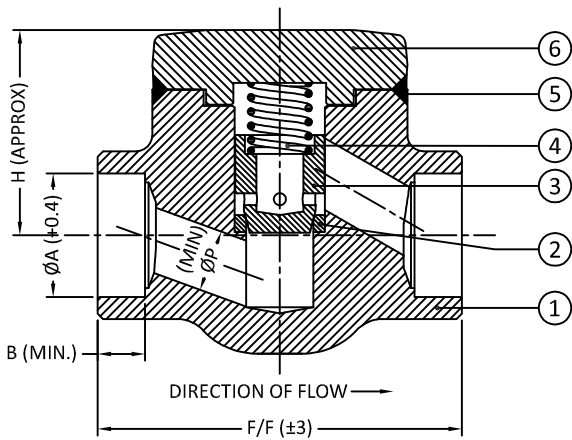

Application Standards

- 1 - Design and manufacture conform to API 602 / ISO 15761
- 2 - Connection ends conform to
 - 1) Socket weld standard :- ASME B16.11.
 - 2) Screwed end standard :- ASME B1.20.1.
 - 3) Butt-weld standard :- ASME B16.25.
- 3 - Testing standard API 598
- 4 - Structure features
Welded cover
- 5 - Materials conform to ANSI / ASTM
- 6 - Main materials
A105, F304, F304L, F316, F316L, F5, F9, F11, F22, F51, F55, F91, LF2.

2500#					
SIZES	F/F	ØP	ØA	B	H
15 mm	100	7.0	21.8	9.5	66
20 mm	145	12.5	27.2	12.5	86
25 mm	160	15.5	33.9	12.5	104
32 mm	172	21.5	42.7	12.5	127
40 mm	172	26.5	48.8	12.5	127

HYDRO TEST PRESSURE (15 Sec.)	
2500#	
SHELL/BODY	655 kg / cm ²
SEAT	485 kg / cm ²

6	CHECK PLATE	ASTM A105/F304/F304L/F316/F316L/F5/F9/F11/F22/F51/F55/F91/LF2	1
5	BODY BONNETJOINT	WELDEDBONNET	-
4	SPRING	ASTM A 313 GR. SS-304/304L/316/316L	1
3	PLUG	ASTM A 276 TYPE SS-410/304/304L/316/316L	1
2	SEAT RING	ASTM A 182 GR. F6a/F304/F304L/F316/F316L	1
1	BODY	ASTM A105/F304/F304L/F316/F316L/F5/F9/F11/F22/F51/F55/F91/LF2	1
NO.	DESCRIPTION	MATERIALS	Qty.